

Call share

(KX-TGP series)

No. 05-005

March 3 , 2011

Ver.1.0

Panasonic Corporation


Abstract about this document

This document describe about behavior of call share (Barge-in, Joining a call) by using multiple lines.



Revision history

Date	Version	Revision	Firmware version
Mar. 3, 2011	Ver. 1.0	Initial Release	All versions



Behavior of Call share

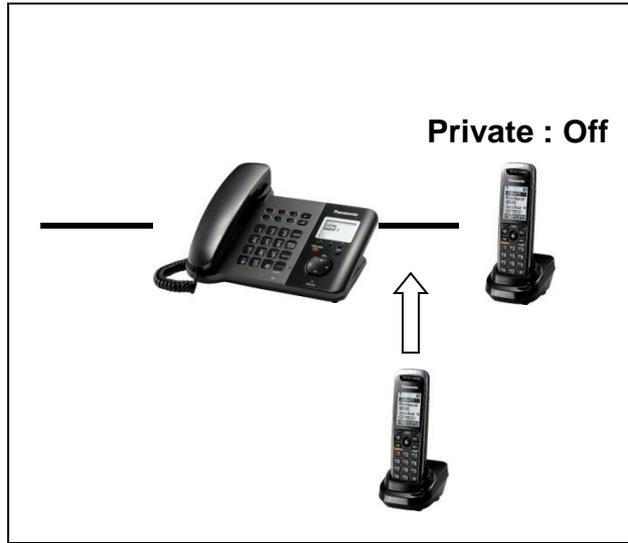

Barge In

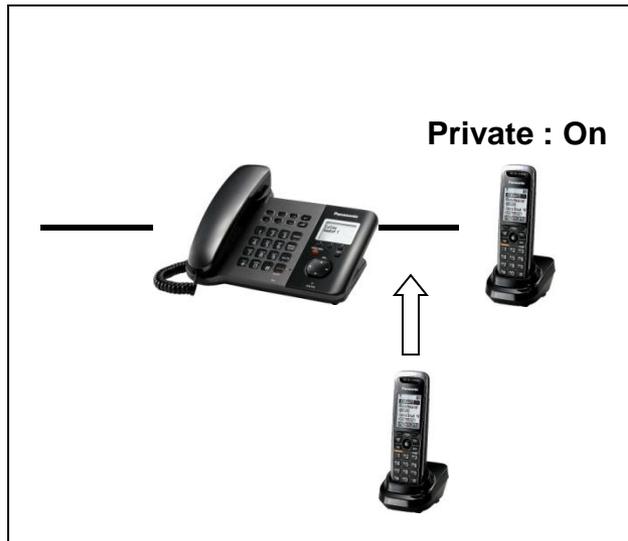

"Barge in" is not allowed

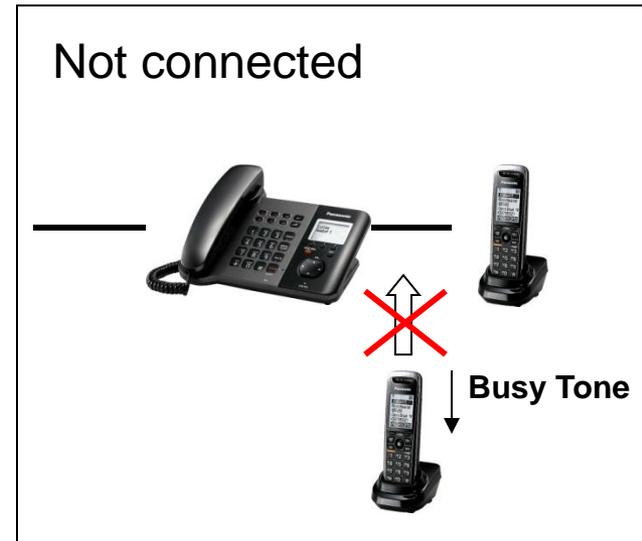

About Call share

Call share

Joining a call

You can join an existing outside call. Availability depends on your phone system. Contact your administrator for further information.

Important:

- The line must be set to allow other units to join through the Web user interface (“Privacy Mode”).  is displayed on the unit currently in use when it is allowed to join the call. Contact your administrator for further information.
- 1 Press **【LINE】** when the other unit is on an outside call.
 - 2 / : Select the desired line to join. → **【SELECT】**

Call share setting

● WEB user interface setting

1. Enter the IP address into a PC's Web Browser.
(refer to final page “How to access Web User Interface”)
2. Login as “Administrator”.
3. Move to [Telephone] – [Line [1-8]] screen.
4. Select “No” at “Enable Privacy Mode”
5. Click [Save].

KX-TGP550T04

Status | Network | System | VoIP | **Telephone** | Maintenance

Call Control [Line 1]

Web Port Close

Telephone

- Multi Number Settings
- Call Control
 - Line 1
 - Line 2
 - Line 3
 - Line 4
 - Line 5
 - Line 6
 - Line 7

Call Control

Display Name

Enable Privacy Mode Yes No

Voice Mail Access Number

Enable Shared Call Yes No

Unique ID of Shared Call

Synchronize Do Not Disturb and Call Forward Yes No

Ring Count

count(s) [0, 2-20]

Save Cancel

● Configuration file setting

```
PRIVACY_MODE_1="N"  
PRIVACY_MODE_2="N"  
PRIVACY_MODE_3="N"  
PRIVACY_MODE_4="N"  
PRIVACY_MODE_5="N"  
PRIVACY_MODE_6="N"  
PRIVACY_MODE_7="N"  
PRIVACY_MODE_8="N"
```

1. Add or change the above-mentioned setting to existing configuration file.
Note!! If the same parameter is specified in a configuration file more than once, the value specified first is applied.
2. Apply Configuration file into TGP5xx

How to access Web user interface

1. Confirm the IP address of KX-TGP5xx.

1-1 : Handset [MENU] (center of joystick) → [#][5][0][1].

Base Unit [MENU] (center of joystick) → [#][5][0][1].(KX-TGP550 only)

1-2 : Confirm the IP address displayed on LCD.

2. Embedded Web.

2-1 : Handset [MENU] (center of joystick) → [#][5][3][4].

Base Unit [MENU] (center of joystick) → [#][5][3][4].(KX-TGP550 only)

2-2 : Select (On) → [SAVE] (center of joystick) → [OFF].

3. Access the Web user interface.

3-1 : Open your Web browser.

3-2 : Enter your KX-TGP5xx URL to Web browser
(http://your KX-TGP5xx IP address) .

3-3 : Enter Authentication ID and password and click “OK”.
(Default :ID=“admin”, password=“adminpass”)