

# **Reset functions**

(KX-UT1xx series/248)

No. 14-001

May 25 , 2012

Ver.1.1

Panasonic Corporation

## Abstract about this document

This document describe about some “Reset” functions in UT1xx/248.

## Revision history

Date	Version	Revision	Firmware version
Jun. 22, 2011	Ver. 1.0	Initial Release	All versions
May 25, 2012	Ver. 1.1	Correct IP reset procedure/Add UT248	All versions

# Outline

- 1) Two kinds of “Reset” function
- 2) Correspondence table of “Reset” function and Parameter
- 3) Reset Method
  - Reset Web settings
  - Resetting the Network Settings (IP Reset)
- How to access Web user interface

# 1) Two kinds of “Reset” function

In UT1xx, there are two kinds of “Reset” features. One is available through WEB user interface, the other is available through direct command in phone.

	Reset Web settings	IP Reset
Interface	Web	Phone Command
Access Level	Administrator	All users
Description	<p>This “Reset” function allows the user to put all settings previously configured via WEB user interface back to a default value.</p> <p>NOTE: If these settings were made through configuration file programming, the set values made through configuration file programming remain effective, even if you perform Reset Web Settings.</p>	<p>This “Reset” function allows the user to put all settings <b>related to IP settings(*)</b> back to a default value.</p> <p>(*)Refer to next page</p> <p>NOTE: If these settings were made through configuration file programming, the set values made through configuration file programming remain effective, even if you perform IP Reset.</p>

## 2) Correspondence table of “Reset” function and Parameter

		Reset Web settings	IP Reset
Pre-provisioning Data(*1)		-	-
Provisioning Data(*2)		-	-
Web Setting Data		cleared	partly cleared(*3)
Terminal Setting Data	Network setting	cleared	cleared
	Call features	cleared	-
	Ringer settings	-	-
	Date and time	-	-
	Call block	cleared	-
	Auto Intercom	-	-
	LCD contrast	-	-
	Key tone	-	-
	Auto talk	-	-
	Message alert	-	-
	Registration	-	-
	Handset name	-	-
	Change language	-	-
	Phone book	-	-
	Caller list	-	-
	Speed/Duplex	cleared	cleared
	VLAN setting	cleared	cleared
Terminal No.	-	cleared	

(\*1) : Pre-provisioning Data : The data set by configuration file in place specified with DHCP Option66

(\*2) : Provisioning Data : The data set by configuration file with the exception of Pre-provisioning

(\*3) : The following items configured via WEB user interface can be reset

[Network] - [Basic Network Settings] – [Connection Mode, DHCP Settings, Static Settings]

- [Ethernet Port Settings] – [Link Speed/Duplex Mode, VLAN Settings]

(refer to administrator guide 4.3 Network)


### NOTE!

The item in yellow parts can't be reset by two kind of “Reset” function.

Please inquire of the dealer, if you want to reset these items.

# 3) Reset Method

- Reset Web settings

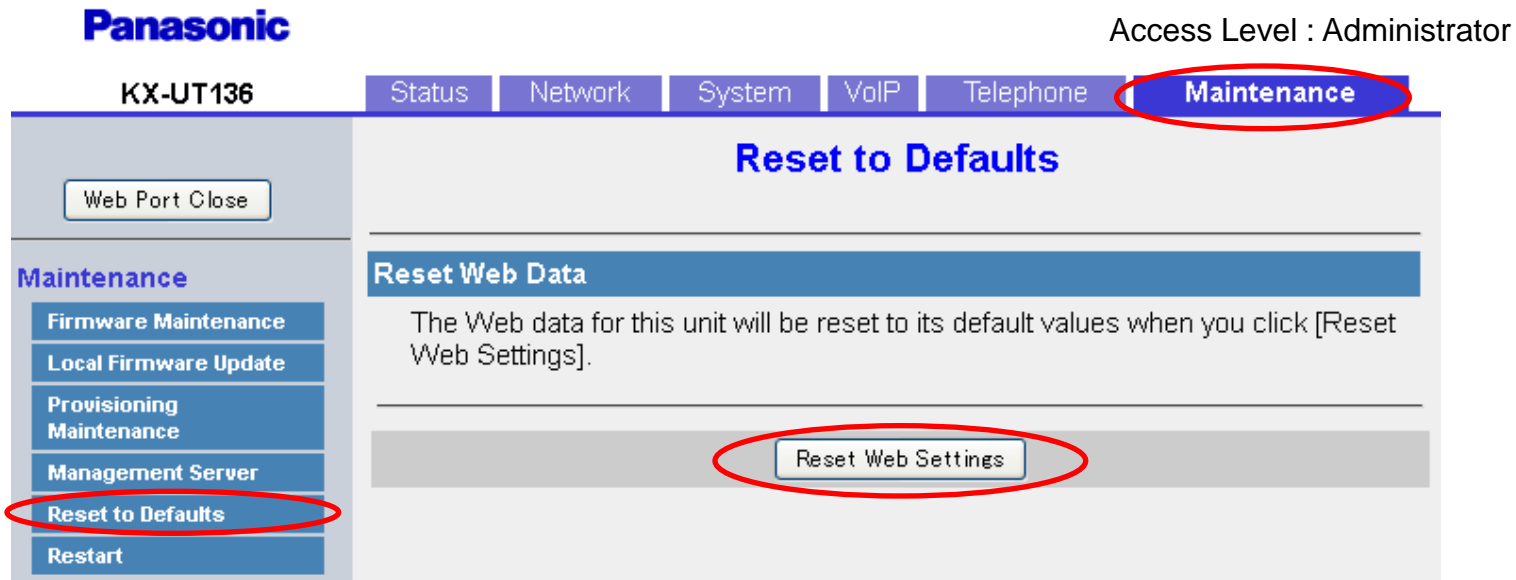

1. Enter the IP address into a PC's Web Browser.  
(refer to final page “**How to access Web User Interface**”)
2. Login “Administrator”.
3. Move to [ Maintenance ] – [ Reset to Defaults ] screen.
4. Click [ Reset Web Settings ]
5. Please wait.  
The Unit reboots automatically.

## 3) Reset Method

- Resetting the Network Settings (IP Reset)

1. [Setting] or [Setup] (Left soft key)
2. [#][1][3][6]
3. [▲] or [▼] -> Select “IP Reset” -> [Enter]
4. [▲] or [▼] -> Select “Yes” -> [Enter]
5. [▲] or [▼] -> Select “Yes” -> [Enter]
6. Terminal is reset after beep.

# How to access Web user interface

1. Confirm the IP address of KX-UT1xx/248.
  - 1-1 : [Setting] (Left soft key) → select [Information Display] → [Enter] → [Down] (joystick).
  - 1-2 : Confirm the IP address displayed on LCD.
  
2. Embedded Web.
  - 2-1 : [Setting] (Left soft key) → [#][5][3][4].
  - 2-2 : Select [On] → [Enter].
  
3. Access the Web user interface.
  - 3-1 : Open your Web browser.
  - 3-2 : Enter your KX-UT1xx/248 URL to Web browser (http://your KX-UT1xx/248 IP address) .
  - 3-3 : Enter Authentication ID and password and click “OK”.  
(Default :ID=“admin”, password=“adminpass”)