

The parameters which restrict access to network settings from user authority

(KX-UT670)

No. 22-009

Dec 22 , 2011

Ver.1.0

Panasonic Corporation

Abstract about this document

This document describe about The parameters that controls accessibility to the network settings by user authority.

Revision history

Date	Version	Revision	Firmware version
Dec 22, 2011	Ver. 1.0	Initial Release	All versions

◆ Interface that can be set network settings by user authority as default

- Phone user interface
- WEB user interface

◆ Configuration parameter that controls the accessibility to network settings by user authority

1. NW_SETTING_ENABLE

Specifies whether to enable the network settings from the unit.

2. CUSTOM_WEB_PAGE


Specifies whether to enable the settings in “Basic Network Settings” from the Web user interface when logged in with the User account.

1. NW SETTING ENABLE

Value Format	Boolean
Description	Specifies whether to enable network and NTP server settings from the unit. Note <ul style="list-style-type: none">• If you change this setting to "N" when network or NTP server settings have been made through Web user interface programming (→ see 4.4.1 Basic Network Settings), clear these settings once by performing Reset Web Settings from the Web user interface, and then change this setting to "N".
Value Range	<ul style="list-style-type: none">• Y (Enable network and NTP server settings)• N (Disable network and NTP server settings)
Default Value	Y

*Refer to Administrator Guide

In case of 「NW_SETTING_ENABLE="N"」(Disable network and NTP server settings)

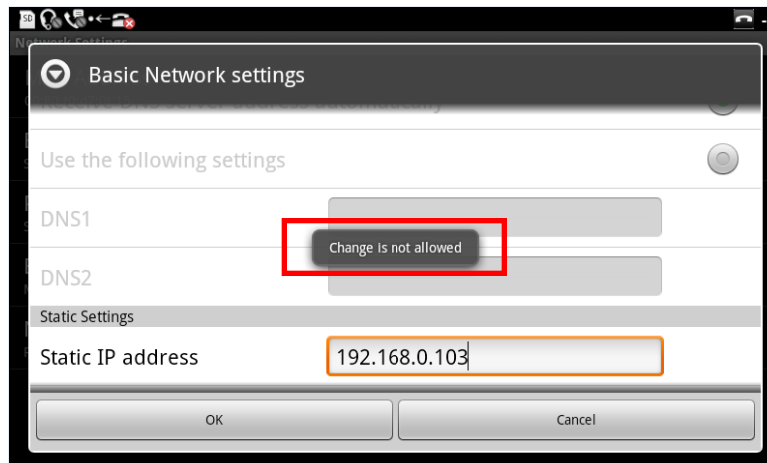

If you change the items of network settings and press "OK", "Change is not allowed" is displayed on LCD and you can not change the items.

2. CUSTOM WEB PAGE

Value Format	Integer
Description	Specifies whether to enable the settings in 4.4.1 Basic Network Settings from the Web user interface when logged in with the User account.
Value Range	0–1 – 0: Enable "Basic Network Settings" – 1: Disable "Basic Network Settings"
Default Value	0

*Refer to Administrator Guide

i) CUSTOM_WEB_PAGE = "0"

Panasonic
KX-UT670NE

Status | **Network** | System | Telephone

Web Port Close

Basic Network Settings

Network

Basic Network Settings | HTTP Client Settings

Connection Mode

Connection Mode DHCP Static

DHCP Settings

Receive DNS server address automatically

Domain Name Server Use the following settings

DNS1

DNS2

Static Settings

Static IP Address

Subnet Mask

Default Gateway

DNS1

DNS2

The phone reboots automatically if you change the settings on this screen.

Save Cancel

User can change items of “Basic Network Settings” when logged in with the user account.

ii) CUSTOM_WEB_PAGE = "1"

Panasonic
KX-UT670NE

Status | **Network** | System | Telephone

Web Port Close

Basic Network Settings

Network

Basic Network Settings | HTTP Client Settings

Connection Mode

Connection Mode DHCP Static

DHCP Settings

Receive DNS server address automatically

Domain Name Server Use the following settings

DNS1

DNS2

Static Settings

Static IP Address

Subnet Mask

Default Gateway

DNS1

DNS2

The phone reboots automatically if you change the settings on this screen.

Save Cancel

User cannot change items of “Basic Network Settings” when logged in with the user account. (Can not click the buttons.)