

Reset functions

(KX-UT670)

No. 24-001

Dec 22 , 2011

Ver.1.0

Panasonic Corporation

Abstract about this document

This document describes about some “Reset” functions in KX-UT670.

Revision history

Date	Version	Revision	Firmware version
Dec 22, 2011	Ver. 1.0	Initial Release	01.020 or later

Outline

- 1) Kinds of “Reset” function
- 2) Correspondence table of “Reset” function and Parameter
- 3) Reset Method
 - Reset Web settings
 - Resetting to Factory Default / Clearing Data and Settings
- How to access Web user interface

1) Kinds of “Reset” function

KX-UT670 has some kinds of “Reset” functions. One is available through WEB user interface, others are available through using “RESET button”.

	Reset Web settings	Reset to factory default	Clear data and settings
Interface	Web	Reset button and select menu	Reset button and select menu
Access Level	Administrator	All users	All users
Description	<p>This “Reset” function allows the user to put all settings previously configured via WEB user interface back to a default value.</p> <p>NOTE: If these settings were made through configuration file programming, the set values made through configuration file programming remain effective, even if you perform Reset Web Settings.</p>	All data is erased. Applications, apart from pre-installed applications, are also erased.	All unit settings and the settings and registered data of applications are erased. However, applications are not erased.

2) Correspondence table of “Reset” function and Parameter

		Reset Web settings	Reset to factory default	Clear data and settings	
Pre-provisioning Data(*1)		-	cleared	cleared	
Provisioning Data(*2)		-	cleared	cleared	
Web Setting Data		cleared	cleared	cleared	
Pre-install Application		-	-	-	
Third-party Application		-	cleared	-	
Terminal Setting Data	Network setting	Speed/Duplex	cleared	cleared	
		VLAN setting	cleared	cleared	
		Other	cleared	cleared	
	Call features		partly cleared	cleared	cleared
	Ringer settings		-	cleared	cleared
	Date and time		-	cleared	cleared
	Language		-	cleared	cleared
	Phone book		-	cleared	cleared
	Caller list		-	cleared	cleared


(*1) : Pre-provisioning Data : The data set by configuration file in place specified with DHCP Option66

(*2) : Provisioning Data : The data set by configuration file with the exception of Pre-provisioning

3) Reset Method

- Reset Web settings

Access Level : Administrator

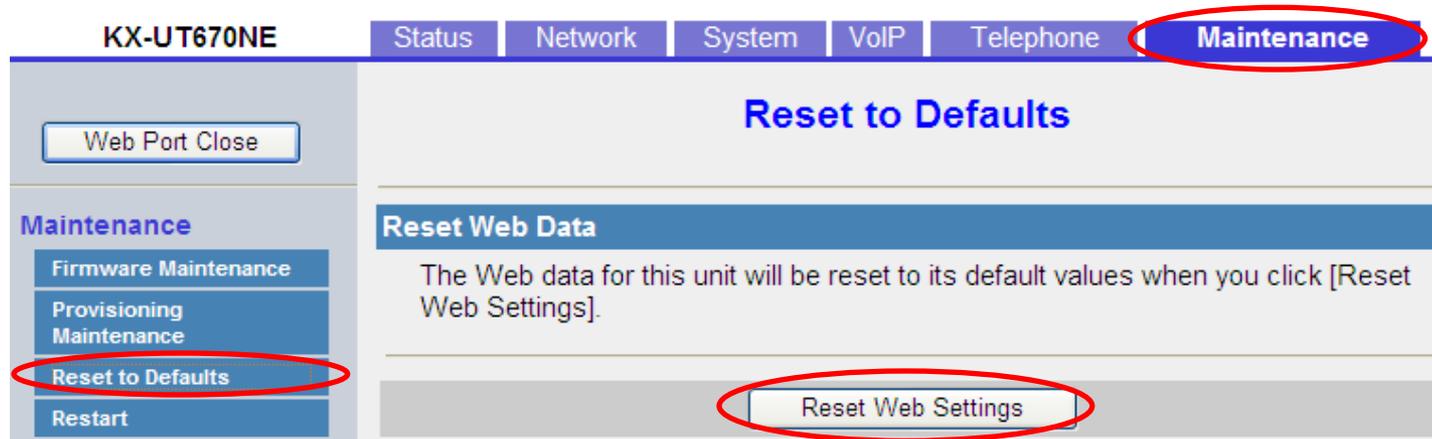


1. Enter the IP address into a PC's Web Browser.
(refer to final page “**How to access Web User Interface**”)
2. Login “Administrator”.
3. Move to [Maintenance] – [Reset to Defaults] screen.
4. Click [Reset Web Settings]
5. Please wait. The Unit reboots automatically.

3) Reset Method


• Resetting to Factory Default / Clearing Data and Settings

When you reset the unit, all settings are returned their factory default status and all data is erased. You can reset the unit in the following 2 ways.

- **Clear data and settings**
All unit settings and the settings and registered data of applications are erased. However, applications are not erased.
 - **Reset to factory default**
All data is erased. Applications, apart from pre-installed applications, are also erased.
1. After starting the unit, press and hold the RESET button (❶) with a pointy object for more than 5 seconds until the screen is cleared.

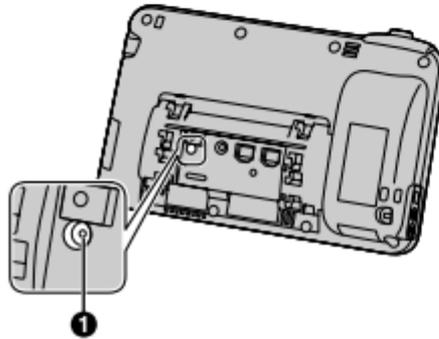

2. After the unit is restarted and ****Reset Menu**** is displayed, tap the key sheet in the following order:



3. Tap  or  to select the resetting type, and then tap .

Note

- For details about the key sheet, refer to the Operating Instructions on the Panasonic Web site (→ see **Introduction**).
- Data stored on the SD card is not erased.
- If you tap **[Cancel]**, the unit will start-up and the Home screen is displayed.
- When the reset is complete, the unit will automatically restart.

How to access Web user interface

1. Confirm the IP address of KX-UT670.

1-1 : [Menu] (Upper left of sheet key) →[Settings] → [About phone] → [Status]

1-2 : Confirm the IP address displayed on LCD.

2. Embedded Web.

2-1 : [Menu] (Upper left of sheet key) →[Settings] → [Network]
→[Embedded web] →select [On]

3. Access the Web user interface.

3-1 : Open your Web browser.

3-2 : Enter your KX-UT670 URL to Web browser
(<http://your KX-UT670 IP address>) .

3-3 : Enter user name (**admin**) and password (**adminpass**) and click “OK”.

3-4 : The Web user interface window is displayed.
Configure the settings for the unit as desired.