

How to configure PS name

(KX-UDS/UDT series)

No. 41-010

August 21 , 2012

Ver.1.0

Panasonic Corporation

Abstract about this document

This document describe about how to configure PS name.

Revision history

Date	Version	Revision	Firmware version
Aug 21, 2012	Ver. 1.0	Initial Release	All versions


Difference between PS Name and Display Name

PS Name



“PS Name” is **user’s handset name** which is displayed on its own handset screen.

Display Name

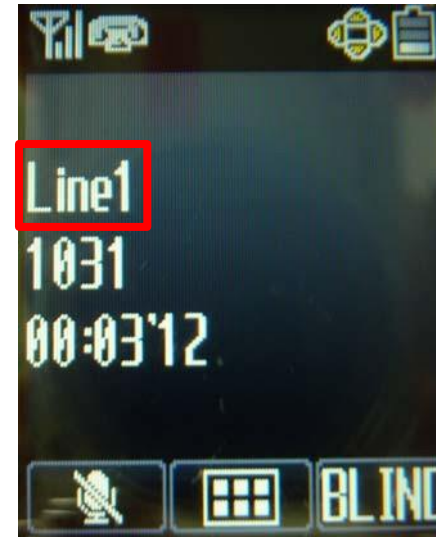

“Display Name” is **the handset name which is displayed as caller’s name** on the other party’s phone.

In case of above picture, other party has set the display name as Line1.

Procedure

<Step1> Confirm IP address of Super Master CS




<Step2> Open the CS Web port




<Step3> Configure PS name

<Step1> How to confirm IP Address of Super Master CS

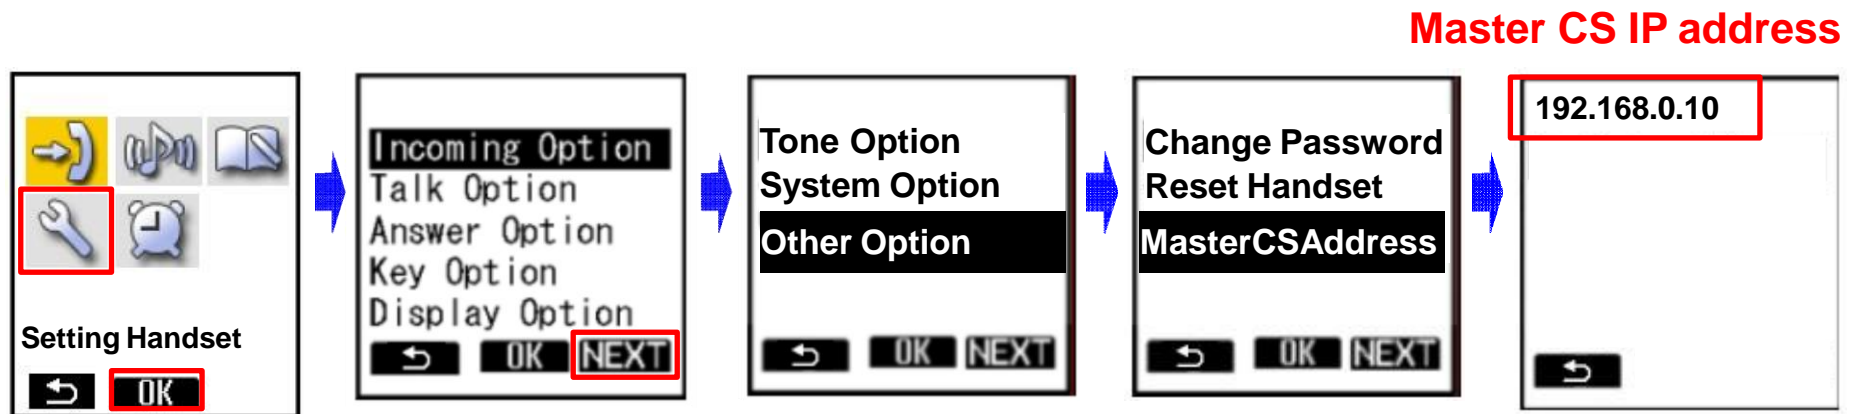

1. Turn on the PS.
2. Press [Menu] or the [CENTER] navigation key.
3. Select **"Setting Handset"** and then press [OK].
4. Press [NEXT].
5. Select **"Other Option"** and then press [OK].
6. Select **"MasterCSAddress"** and the press [OK].
 - Display the Master CS IP address.

<Step2> How to Open the CS Web port

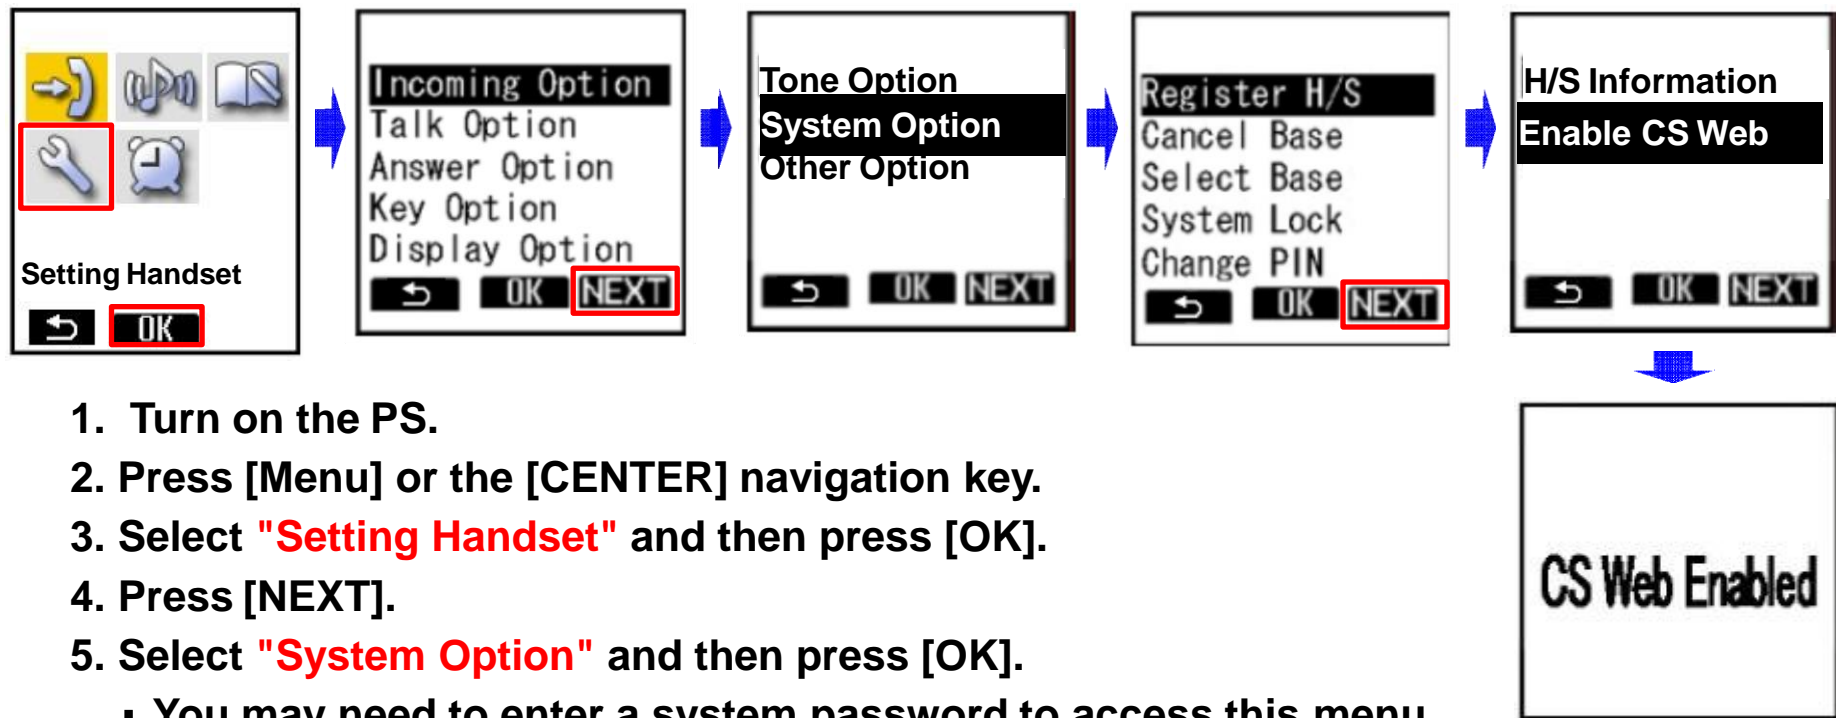

1. Turn on the PS.
2. Press [Menu] or the [CENTER] navigation key.
3. Select **"Setting Handset"** and then press [OK].
4. Press [NEXT].
5. Select **"System Option"** and then press [OK].
 - You may need to enter a system password to access this menu.
6. Press [NEXT] to display the second screen, select **"Enable CS Web"**, and then press [OK].
7. When the operation is complete, "CS Web Enabled" is displayed.

<Step3> Configure the PS name

Panasonic

SIP CS KX-UDS124

Status Network **System** VoIP Telephone Maintenance

Web Logout

Web Port Close

PS Registration

Please push the "Stop PS Registration" button to stop on the way after starting PS Registration.

PS Registration

Please push the "Delete PS Registration" to delete registered PS.

PS Registration Delete

1- 21- 41- 61- 81- 101- 121- 141- 161- 181- 201- 221- 241-

PS Name / Number

No.	PS Name	Select Button	Phone Number	Wireless Status
1	UDT111	<input type="button" value="Line1 SIP Setting"/> <input type="button" value="Line2 SIP Setting"/>		Un Registered
2	UDT121	<input type="button" value="Line1 SIP Setting"/> <input type="button" value="Line2 SIP Setting"/>		Un Registered
3		<input type="button" value="Line1 SIP Setting"/> <input type="button" value="Line2 SIP Setting"/>		Un Registered

ID and Password for administrator
ID : admin
Password : adminpass

1. Log in to the Super Master CS.
2. In the [System] tab, select [PS Registration]. **[System] → [PS Registration]**
3. Enter an extension name in PS Name and Click [All Save].