

How to change web login authority immediately

(KX-UT670)

No. 24-004

Dec 22 , 2011

Ver.1.0

Panasonic Corporation


Abstract about this document

This document describe about procedure for changing web login authority immediately. Sometimes you may receive “403 forbidden” error when you login to Web menu by changing login user id. In such case, please follow the procedure described in this document.

Revision history

Date	Version	Revision	Firmware version
Dec 22, 2011	Ver. 1.0	Initial Release	All versions

Procedure for changing web login authority immediately

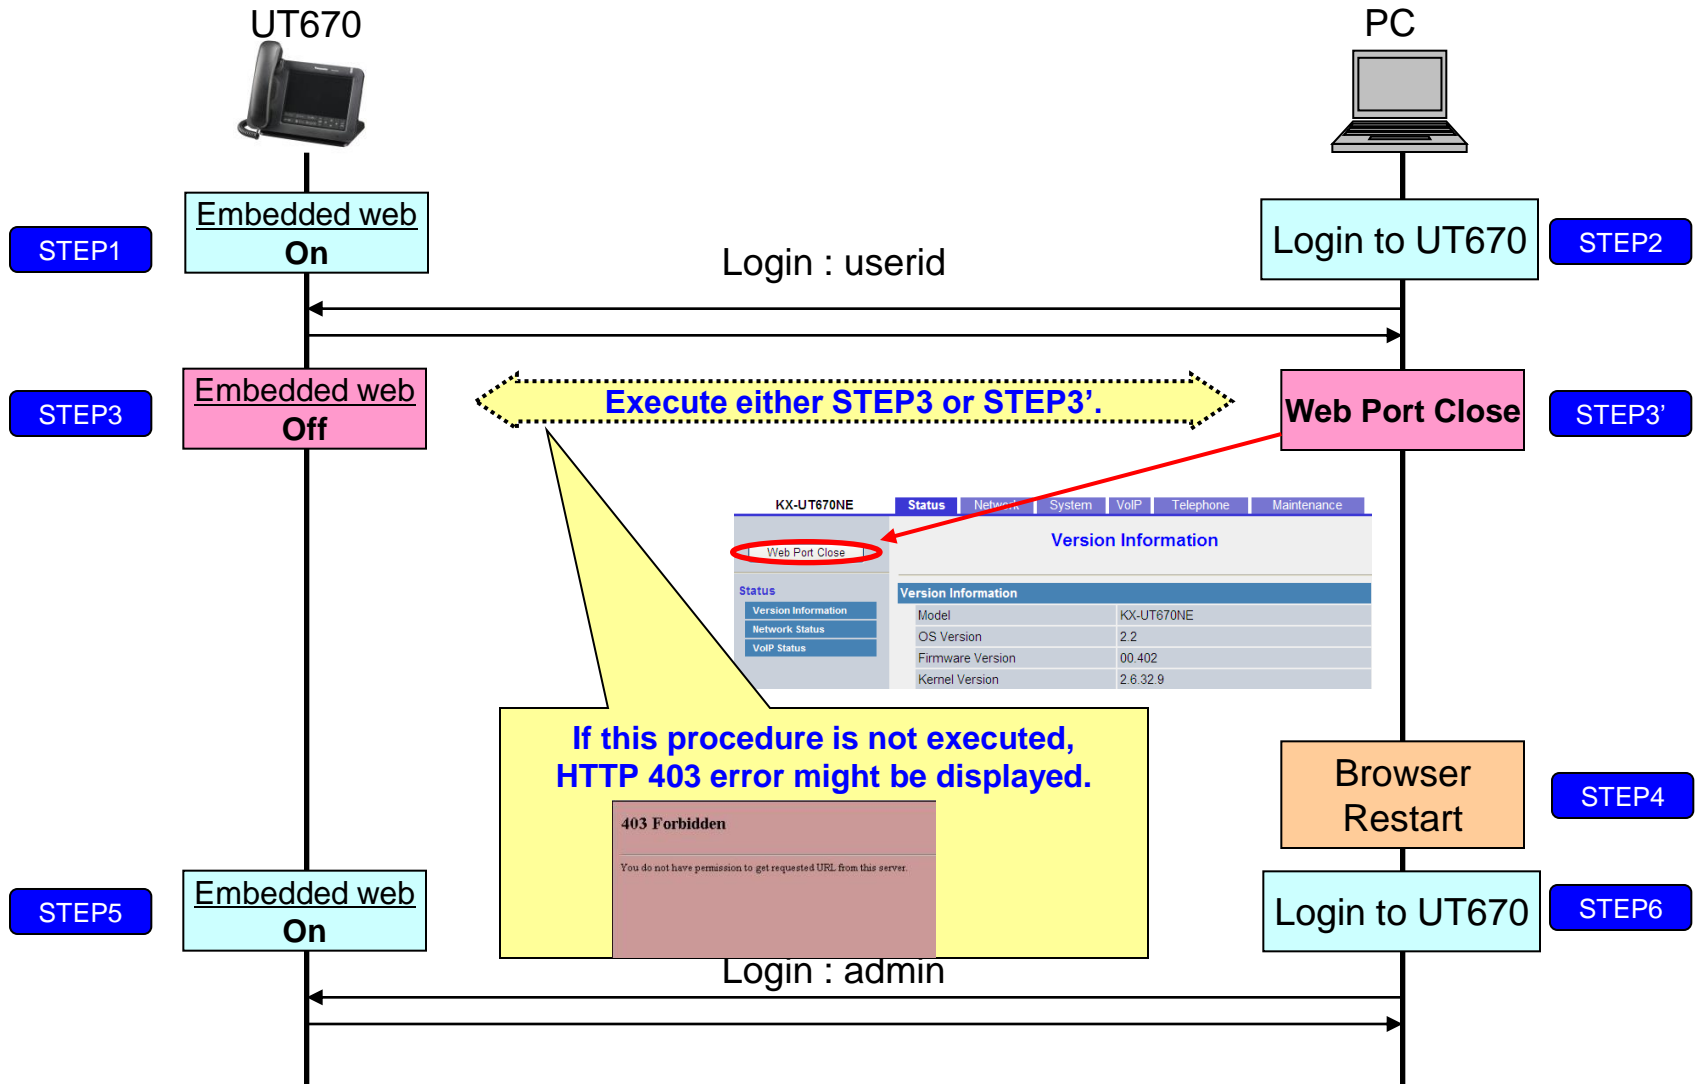

Sometimes you may receive "403 forbidden" error when you login to Web menu by changing login user id from previous login user id. If you receive this error, please turn off and turn on the embedded web setting or close port as described in "STEP3 or STEP3'". Pleaser refer next page for how to control embedded web setting.

How to access Web user interface

1. Confirm the IP address of KX-UT670.

1-1 : [Menu] (Upper left of sheet key) →[Settings] → [About phone] → [Status]

1-2 : Confirm the IP address displayed on LCD.

2. Embedded Web.

2-1 : [Menu] (Upper left of sheet key) →[Settings] → [Network]
→[Embedded web] →select [On]

3. Access the Web user interface.

3-1 : Open your Web browser.

3-2 : Enter your KX-UT670 URL to Web browser
(<http://your KX-UT670 IP address>) .

3-3 : Enter user name (**admin**) and password (**adminpass**) and click “OK”.

3-4 : The Web user interface window is displayed.
Configure the settings for the unit as desired.