
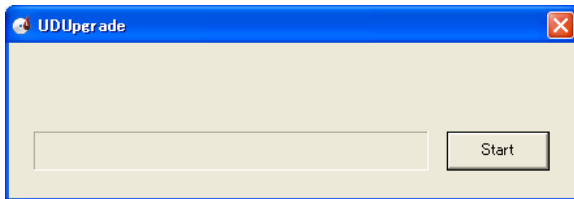


## Method of updating Install Free Kit software


### 1. Method of updating Install Free Kit software

- (1) Turn on the elite Panaboard embedded Install Free Kit.
- (2) Connect the elite Panaboard to your computer with the USB cable.
- (3) Click elite Panaboard software icon  on the notification area and click [Exit] menu after elite Panaboard software launch.
- (4) Execute "UpdateInstallFreeKit\_360.exe"




\* If the "User Account Control" window is displayed, click [Continue] (in Windows Vista) or [Yes] (in Windows Vista).


- (5) Click [Start].



- (6) Click [Yes].

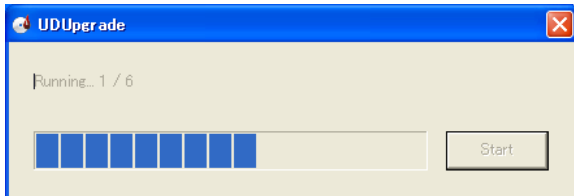

The progress window of updating is displayed.


Click elite Panaboard software icon  on the notification area and click [Exit] menu when elite Panaboard software launch.

[Caution] Don't turn off the elite Panaboard and don't disconnect the USB cable while updating. Updating may take several minutes.


If the message "bNAND Memory not found." is displayed, please check the following conditions and click [Start].

Is the elite Panaboard turned on?

Is the elite Panaboard connected to your computer with the USB cable?

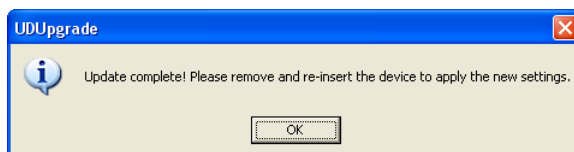

- (7) Click [OK] when the above window is displayed.

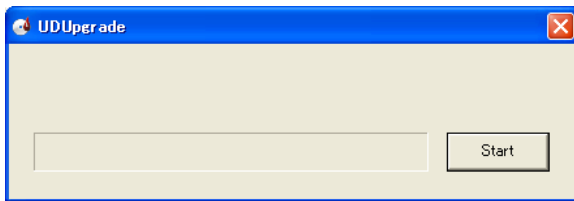

(8) Click Close button ([X]).




(9) Click [OK].

## 2. Confirmation of Updating

(1) Disconnect the USB cable from your computer.

(2) Wait 5 second and connect the USB cable into your computer.

elite Panaboard software launch automatically.

(3) Click elite Panaboard software icon  on the notification area and click [Version] menu.

If the version of elite Panaboard software is 3.6.0.0, the updating have been done normally.

