The parameters which restrict access to network settings from user authority

(KX-TGP series)

No. 02-009

March 3, 2011

Ver.1.0

Panasonic Corporation

Abstract about this document

This document describe about The parameters that controls accessibility to the network settings by user authority.

Revision history

Date	Version	Revision	Firmware version
Mar. 3, 2011	Ver. 1.0	Initial Release	12.02/22.02 or later

- ◆Interface that can be set network settings by user authority as default
 - Phone user interface (base unit(TGP550 only), handset)
 - WEB user interface

- ◆Configuration parameter that controls the accessibility to network settings by user authority
 - 1. NW_SETTING_ENABLE

 Specifies whether to enable the network settings from the base unit and handsets.
 - 2. CUSTOM_WEB_PAGE

Specifies whether to enable the settings in "Basic Network Settings" and "Time Adjust Settings" from the Web user interface when logged in with the User account.

1. NW_SETTING_ENABLE

Value Format	Boolean	
Description	Specifies whether to enable the network settings from the base unit and handsets.	
	Note • If you change this setting to "N" when the network settings (with the exception of "HOST_NAME") in "IP Settings" have been made through Web user interface programming, clear these settings once by performing Reset Web Settings from the Web user interface, and then change this setting to "N".	
Value Range	Y (Enable network settings) N (Disable network settings)	
Default Value	Υ	

Operations limited by NW_SETTING_ENABLE="N" (Phone user interface)

Main menu	Sub-menu 1	Sub-menu 2
IP Service	Network Setting	DHCP
		IP Settings


2. CUSTOM_WEB_PAGE

Value Format	Integer
Description	Specifies whether to enable the settings in "Basic Network Settings" and "Time Adjust Settings" from the Web user interface when logged in with the User account.
Value Range	0–3 – 0: Enable "Basic Network Settings" and "Time Adjust Settings" – 1: Disable "Basic Network Settings" – 2: Disable "Time Adjust Settings" – 3: Disable "Basic Network Settings" and "Time Adjust Settings"
Default Value	0

Operations limited by CUSTOM_WEB_PAGE ="3" (WEB user interface)

Basic Network Settings

	:	
Menu Item	Section Title	Parameter
Basic	Connection Mode	Connection Mode
Network Settings	DHCP Settings	Domain Name Server
	Static Settings	Static IP Address
		Subnet Mask
		Default Gateway
		DNS1
		DNS2

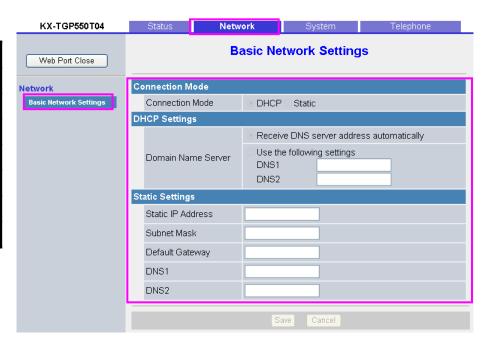

Operations limited by CUSTOM_WEB_PAGE ="3" (WEB user interface)

Time Adjust Settings

